


## YAR 211-200-2F/VA228 Flanged Y-bearing units for high temperature applications

Bearing No. 2308

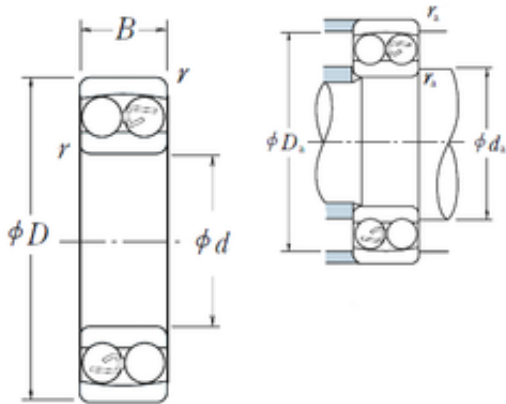

2308 Bearing 2D drawings and 3D CAD models

Size	40x90x33 mm
Bore Diameter	40 mm
Outer Diameter	90 mm
Width	33 mm
d	40 mm
D	90 mm
B	33 mm
C	33 mm
r min.	1,5 mm
da min.	48 mm
Da max.	82 mm
ra max.	1,5 mm
Weight	0,889 Kg
Basic dynamic load rating (C)	45,5 kN
Basic static load rating (C0)	13,5 kN
(Grease) Lubrication Speed	6 300 r/min
(Oil) Lubrication Speed	8 000 r/min
Calculation factor (e)	0,43
Calculation factor (Y0)	1,5
Calculation factor (Y2)	2,3
SRI	7.5
Y3	1.5
hidYobi	2308
LangID	1
PCD	64



## Golden Bearing Pvt. Ltd

D_	90
Y2	2.3
SREX	0
cyl count	12
B_	33
hidTable	ecat_NSSAB
Oil rpm	8000
SRE	0
Y0	1.5
mass	0.889
ra	1.5
GRS rpm	6300
SRIX	0.065
groove inner	49.682
D_a	82
SRIN	0
C0	13.5
groove outer	80.881
SREN	0
X0	1
Prod_Type3	SABB_SA_CB
X1	1
da	48
X2	0.65
e	0.43
yobi	2308
r	1.5
KBRG	1354
CAng	16.04
cyl dia	14.288