


## YAR 206-2FW/VA228 Ball bearing flanged units for high temperature

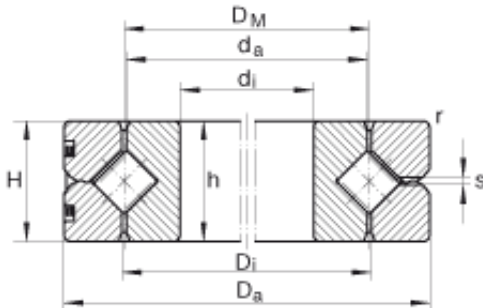

SX011840 Bearing 2D drawings and 3D CAD models

Bearing No. SX011840

Size	200x250x24 mm
Bore Diameter	200 mm
Outer Diameter	250 mm
Width	24 mm
$d_i$ - 200 mm / Tolerance: K6 +0,004 / -0,024	200 mm / Tolerance: K6 +0,004 / 0,024
$D_a$ - 250 mm / Tolerance: h6 -0,029	250 mm / Tolerance: h6 0,029
H - 24 mm / Tolerance: +/-0,13	24 mm / Tolerance: +/-0,13
$D_i$	225,8 mm
$D_M$	225 mm
$d_a$	224,2 mm
h - 24 mm / Tolerance: E8 -0,025	24 mm / Tolerance: E8 0,025
$r_{min}$	1,5 mm
S	2 mm
m	3,1 kg / Weight
	0,015 mm / Running accuracy, radial
	0,010 mm / Running accuracy, axial
$S_{r min}$	0,005 mm / Min. radial bearing clearance
$S_{r max}$	0,025 mm / Max. radial bearing clearance
$S_{k min}$	0,010 mm / Min. axial tilting clearance



Golden

## Golden Bearing Pvt. Ltd

$S_{k\ max}$	0,05 mm / Max. axial tilting clearance
$RLO_{\max}$	0,005 mm / Low clearance: Radial clearance
$RLO_{\max}$	0,010 mm / Low clearance: Preload
$VSP_{\min}$	0,005 mm / Min. bearing preload
$VSP_{\max}$	0,025 mm / Max. bearing preload
$C_a$	102000 N / Dynamic load rating (axial)
$C_{0a}$	425000 N / Static load rating (axial)
$C_r$	72000 N / Dynamic load rating (radial)(for radial load only)
$C_{0r}$	170000 N / Static load rating (radial)(for radial load only)
$n_{G\ Oil}$	680 1/min / Limiting speed for oil lubrication with normal clearance
$n_{G\ Fett}$	340 1/min / Limiting speed for grease lubrication with normal clearance
$n_{G\ Oil}$	340 1/min / Limiting speed for oil lubrication with preload
Category	Ball Bearings
Inventory	0.0
Manufacturer Name	SCHAEFFLER GROUP
Minimum Buy Quantity	N/A
Weight / Kilogram	0
Product Group	B00234